




NOTE:

“PRIVEE” CHAIN BARRIER

FOR PROTECTING PRIVATE ACCESSES UP TO 16 m WIDE

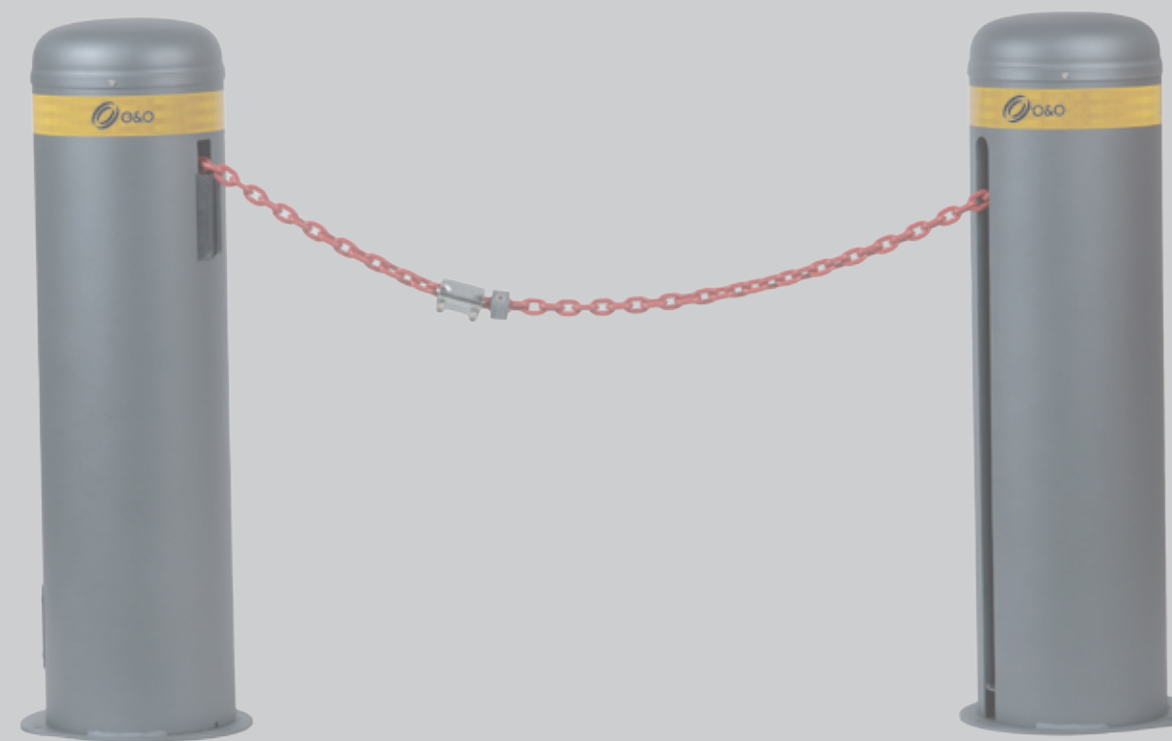

cod. 035528-EN 03/12

O&O S.r.l.
Via Europa, 2
42015 Correggio (RE)
Italy 


Tel. +39 0522 740111
Fax. +39 0522 631290
Mail: oeo@oeo.it
Web. www.oeo.it

www.oeo.it

EN

PRIVEE

FOR PROTECTING PRIVATE ACCESSES UP TO 16 m WIDE

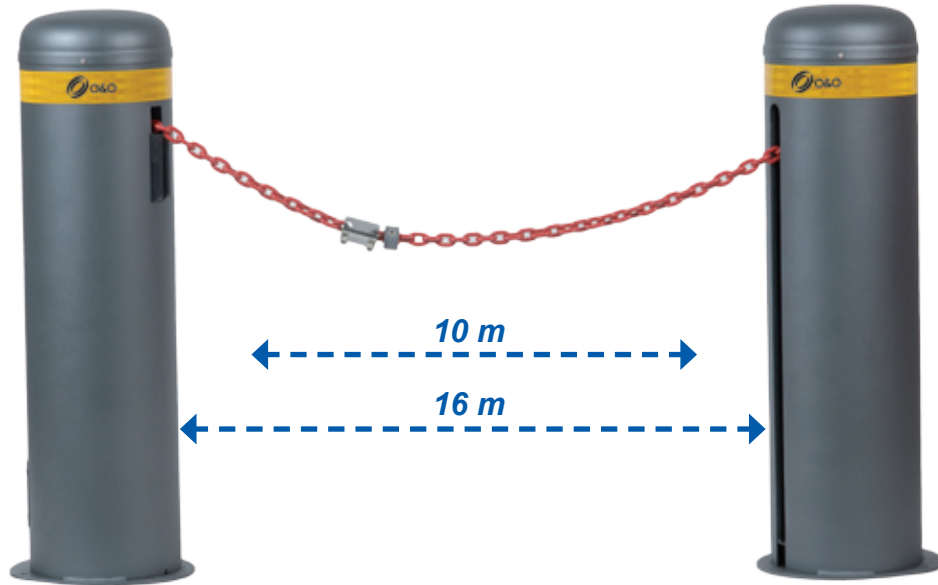

Complete with template and fasteners

DESCRIPTION:

“PRIVEE” new 24 Vdc automatic chain barrier for intensive use. Used to close accesses to residential and industrial areas and small private car parks with entrance width up to 16 metres. Hard-wearing, cataphoresis-treated steel structure painted grey RAL 7022, “PRIVEE” is an excellent solution for protecting public and private areas; it offers value for money, is safe and blends in perfectly with the city environment.

STRENGTHS:

EASY TO INSTALL

With no limit switches, the product is extremely simple to install as the travel length is self-learned electronically.

ON BOARD CONTROL UNIT

The new “PRIVEE” is fitted as standard with the LOG-BC control unit with integrated 64-code radio receiver with the possibility to manage the radio controls through the O&O “DOMINO” manager


RELIABILITY

Without limit switches, PRIVIEE is extremely reliable, as there are less mechanical components subject to wear

SAFETY BATTERY


With its low-voltage 24 Vdc motor, “PRIVEE” can be equipped with electric batteries to assure operation also in the event of a black out.

PRODUCTS ON CATALOGUE:

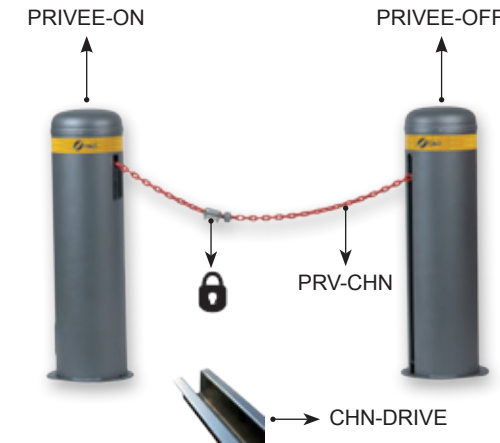

| CODE | MODEL | DESCRIPTION |
|--------|-------------|---|
| 321500 | PRIVEE-ON | Motorized pillar 24V with control unit and receiver built-in |
| 321510 | PRIVEE-OFF | Counterweighted pillar to be used with “PRIVEE-ON” |
| 321520 | PRV-CHN 10 | DIN 766 chain Ø 8 mm (for passage up to 10 m) armored lock including |
| 321521 | PRV-CHN 16 | Common chain Ø 4,5 mm (for passage up to 16 m) armored lock including |
| 321530 | CHN-DRIVE 2 | Galvanised guide with reinforced profile to be installed underground to house the chain |

SIZE:

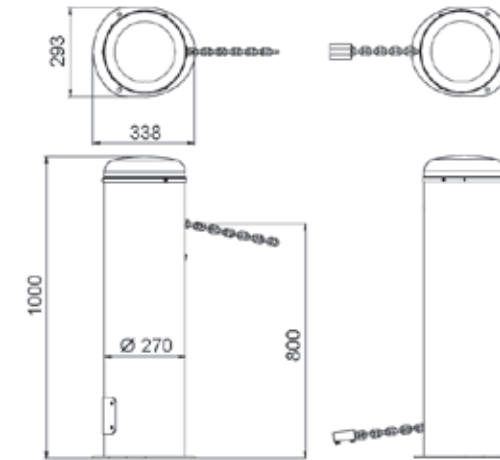

SOME TECHNICAL DETAILS:

- 10 seconds opening time
- 20 °C a +60 °C working temperature
- 50 cm minimum chain height
- LOG-BC control unit built-in with integrated receiver
- Safety reversing with ENCODER
- For intensive use

STANDARD SUPPLY:



ACCESSORIES:

